



	S TECHNOLOGY	K	I GROUP F	
	TECHNOLOGY GROUP	TECHNOLOGY AND COMPONENTS FOR BULK MATERIALS HANDLING	2024 CATALOG PRODUCT SERVICE	
	JET FDA VLE JET Flam VLE JET Oil VLE	  	• Increasing the energy efficiency of the equipment; • Installation in just one operation; • No need to control the tension of the belt; • Elongation - 0,8 % only; • No elongation after first installation; • More safety: no risk of slip; • Less settings costs and maintenance costs; • Can be use with smaller pulley.	
		www.skif.sk		

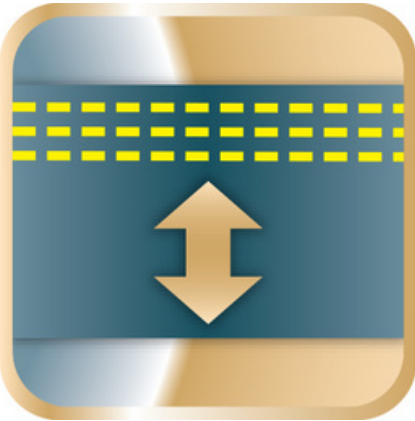

JET OIL VLE

0.8% minimal elongation, antistatic SBR/NBR rubber coating, resistant to vegetal and animal fats, 3+1 configuration for enhanced adherence and durability, anti-abrasive properties meeting ISO 4649 standards, robust polyester-polyamide textile base, operating temperature range: -25°C to +80°C.




Breaking strength (N/mm)	400	630	800	1000	1250	1600
Number of folds	1	1	1	2	2	2
Thicknesses *(mm) + Coating	2+1 4.9	3+1 6.1	3+1 6.9	3+1 10.0	3+1 10.2	3+1 11.9
Average pea (Kg)	4.9	7.4	8.4	10.2	10.4	12.2
Encapsulated pulley diameter (mm)	200	250	315	630	630	800
Bare pulley diameter (mm)	250	315	500	800	800	1000
Maximum recommended width (mm)	650	1000	1250	1060	1800	1800



JET FDA VLE

0.8% low elongation, NBR white rubber, antistatic, ISO 340 flame resistance, resistant to vegetal and animal oils, 3+1 configuration for better adherence and durability, antiabrasive (ISO 4649<200mm³), with a durable polyester-polyamide textile carcass, operational in temperatures from -25°C to +80°C, peak at 100°C.

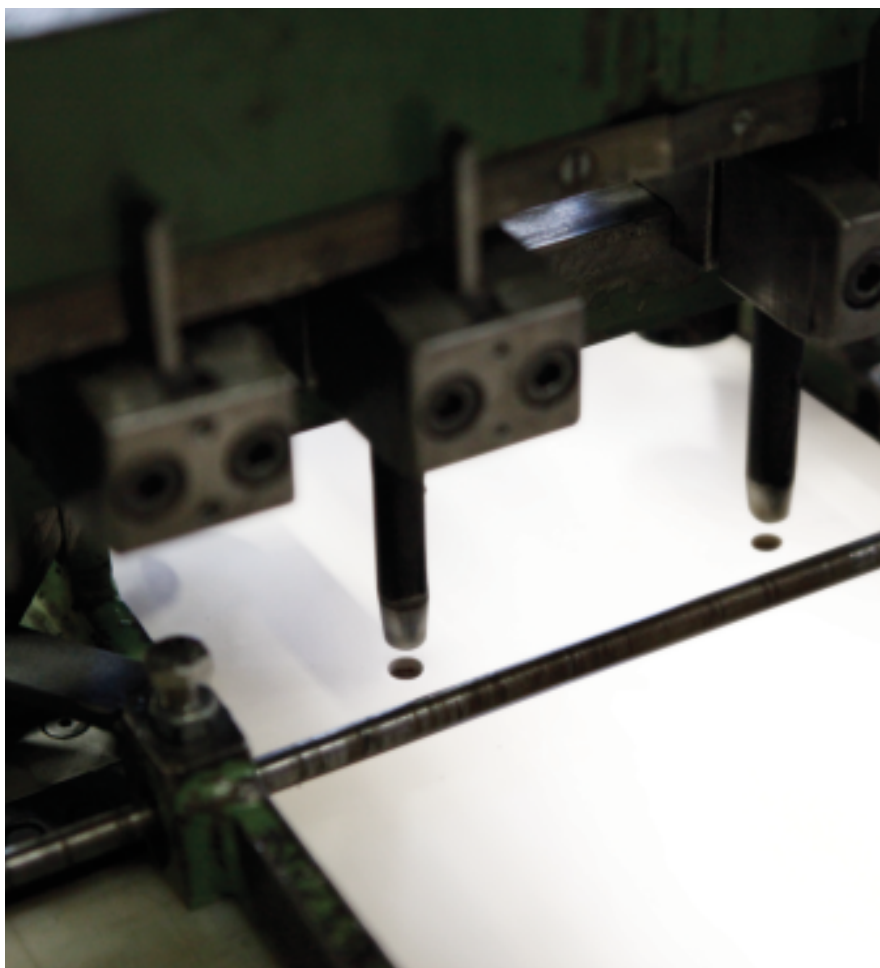

Breaking strength (N/mm)	400	630	800	1000	1250	1600
Number of folds	1	1	1	2	2	2
Thicknesses *(mm) + Coating	3+1 5.9	3+1 6.1	3+1 6.9	3+1 10.0	3+1 10.2	3+1 11.9
Average pea (Kg)	7.9	8.2	9.1	11.1	11.3	13.1
Encapsulated pulley diameter (mm)	200	250	315	630	630	800
Bare pulley diameter (mm)	250	315	400	800	800	1000
Maximum recommended width (mm)	650	1000	1250	1600	1800	1800



JET FLAM VLE

0.8% low elongation, 100% NBR black rubber, antistatic, ISO 340 flame resistance, highly resistant to minerals, vegetal, and animal fats, 3+1 configuration for better adherence and durability, antiabrasive (ISO 4649<170mm³), with a robust polyester-polyamide textile carcass, operational from -25°C to +80°C.



Breaking strength (N/mm)	400	630	800	1000	1250	1600
Number of folds	1	1	1	2	2	2
Thicknesses *(mm) + Coating	3+1 5.9	3+1 6.1	3+1 6.9	3+1 10.0	3+1 10.2	3+1 11.9
Average pea (Kg)	7.9	8.2	9.1	11.1	11.3	13.1
Encapsulated pulley diameter (mm)	200	250	315	630	630	800
Bare pulley diameter (mm)	250	315	500	800	800	1000
Maximum recommended width (mm)	650	1000	1250	1060	1800	1800